



HEAVY DUTY

Air Circulator Fans

- Robust industrial fan design ensures durability, reliability, and high performance.
- Finger safety guards prioritize workplace safety.
- Strong built which delivers optimal airflow with low sound levels.

HEAVY DUTY

Air Circulator Fans

Features

Our industrial heavy-duty fans combine robust construction with powerful motors for reliable performance in any setting. With adjustable features, safety mechanisms, and customizable options, they offer durability, versatility, and style.



Superior durability with fortified construction.



Dynamically balanced blades for uninterrupted performance.



Versatile mounting options for diverse installations.



Effortless assembly for quick setup.



Potent 2 or 3-speed 230-volt motors for robust performance.



Powder-coated finish for long-lasting durability.



Pre-lubricated ball bearings ensure smooth operation.



Available in both OST and Non-OST models.



International safety standards met with fan guards.



Customizable color schemes for personalization.



Automatic thermal overload protection for motor safety.



Oscillation with 90-degree sweep or direct airflow cushion tilt adjustment for tailored airflow.



Precision tilt adjustment for tailored airflow.




Height adjustable pedestal for optimal positioning.

HEAVY DUTY

WALL FAN

Air Circulator Fans

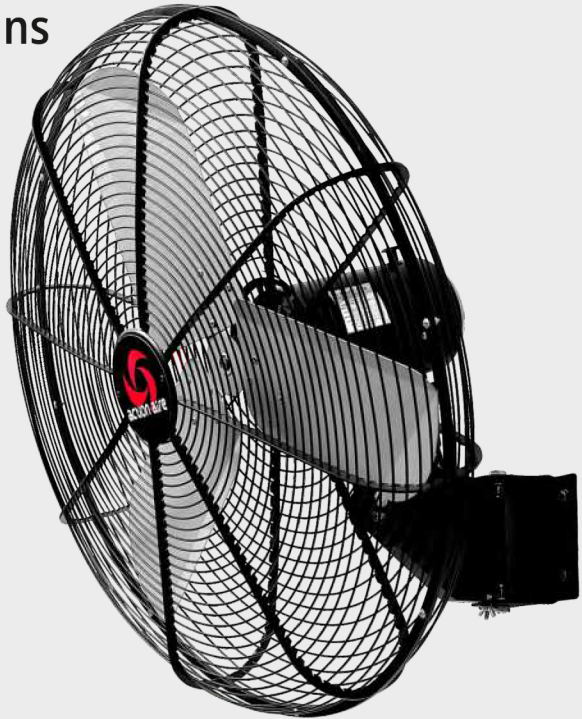

MODEL	WALL FAN	HP	RPM	WATTAGE	AIR DELIVERY
18-HDWF	18" Oscillating	1/6	1400/1200/1000	100W	125 M ³ /Min
20-HDWF	20" Oscillating	1/6	1400/1200/1000	120W	140M ³ /Min
24-HDWF	24" Oscillating	1/4	1400/1200/1000	200W	263 M ³ /Min
30-HDWF	30" Oscillating	1/4	1400	250W	370 M ³ /Min

Performance figures generally conforming to IS:2997 Due to continuous development and innovation, the above specifications are subject to change

HEAVY DUTY PEDESTAL FAN

Air Circulator Fans



MODEL	PEDESTAL	HP	RPM	WATTAGE	AIR DELIVERY
18-HDPF	18" Oscillating	1/6	1400/1200/1000	100W	125 M ³ /Min
20-HDPF	20" Oscillating	1/6	1400/1200/1000	120W	140M ³ /Min
24-HDPF	24" Oscillating	1/4	1400/1200/1000	200W	263 M ³ /Min
30-HDPF	30" Oscillating	1/4	1400	250W	370 M ³ /Min

Performance figures generally conforming to IS:2997 Due to continuous development and innovation, the above specifications are subject to change